

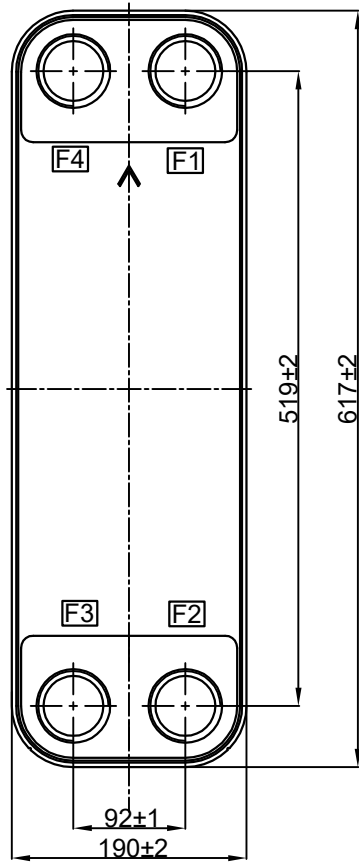


G2" Connection(L023)

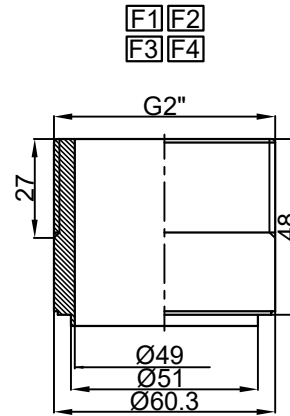

F3 F4 нагреваемая сторона: F3 вход, F4 выход

F1 F2 греющая сторона: F1 вход, F2 выход



Design pressure(MPa)	4.5
Testing pressure(MPa)	6.7
Design Temperature(°C)	-196~+200°C
Label Code	

FHT5433-071		150	372±8	F1F2side:15.75 ;F3F4side:15.54	65.70	14.06
FHT5433-070		140	348±5	F1F2side:14.70 ;F3F4side:14.49	61.80	13.11
FHT5433-069		130	325±5	F1F2side:13.65 ;F3F4side:13.44	57.90	12.16
FHT5433-068		120	301±5	F1F2side:12.60 ;F3F4side:12.39	54.00	11.21
FHT5433-067		110	278±5	F1F2side:11.50 ;F3F4side:11.34	50.10	10.26
FHT5433-066		100	254±5	F1F2side:10.50 ;F3F4side:10.29	46.20	9.31
FHT5433-065		90	230±3	F1F2side:9.45 ;F3F4side:9.24	42.30	8.36
FHT5433-064		80	207±3	F1F2side:8.40 ;F3F4side:8.19	38.40	7.41
FHT5433-063		70	183±3	F1F2side:7.35 ;F3F4side:7.14	34.50	6.46
FHT5433-062		60	160±3	F1F2side:6.30 ;F3F4side:6.09	30.60	5.51
FHT5433-061		50	136±3	F1F2side:5.25 ;F3F4side:5.04	26.70	4.56
FHT5433-060		40	112±2	F1F2side:4.20 ;F3F4side:3.99	22.80	3.61
FHT5433-059		30	89±2	F1F2side:3.15 ;F3F4side:2.94	18.90	2.66
Drawing No.	Customer Part No.	Plate No.	A(mm)	Volume(L)	Weight (kg)	Heat transfer area(m²)

Connection vertical degree: ±2°

Mark	No.	Change file No	sign	Date
Design		XUZH	Standard	
Check		Approved		
Review		Edition	A/0	
Process		Date	20220427	



Plate material: 316L
Connection material: 304
Cover plate material: 304

SNB095-N-4.5-H
F1F2F3F4(G2")

View	Scale	Size
1 : 6		