
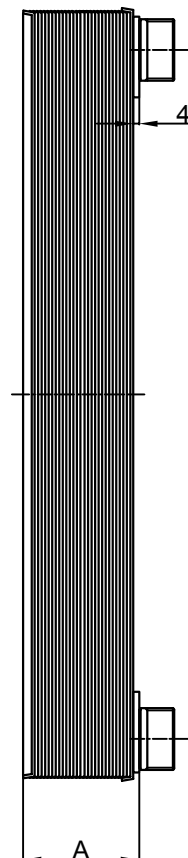



"Термосистемы" г. Краснодар

8-800-301-02-65


info@teploobmennik-russia.ru

www.teploobmennik-russia.ru

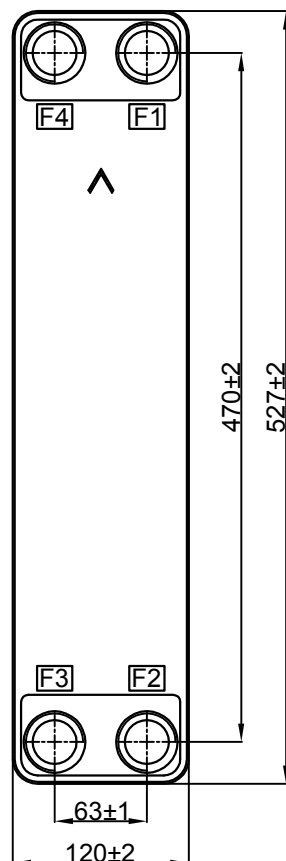


G1"1/4 Connection(L017C)

F1 F2



F3 F4 нагреваемая сторона: F3 вход, F4 выход

F1 F2 греющая сторона: F1 вход, F2 выход



|                        |             |
|------------------------|-------------|
| Design pressuer(MPa)   | 4.5         |
| Testing pressuer(MPa)  | 6.7         |
| Design Temperature(°C) | -196~+200°C |
| Label Code             |             |

|             |                   |           |       |                             |             |                                     |
|-------------|-------------------|-----------|-------|-----------------------------|-------------|-------------------------------------|
| FHT5433-045 |                   | 100       | 242±5 | F1F2side:5.55;F3F4side:5.44 | 22.00       | 5.88                                |
| FHT5433-044 |                   | 90        | 219±3 | F1F2side:5.00;F3F4side:4.88 | 20.12       | 5.28                                |
| FHT5433-043 |                   | 80        | 196±3 | F1F2side:4.44;F3F4side:4.33 | 18.24       | 4.68                                |
| FHT5433-042 |                   | 70        | 173±3 | F1F2side:3.89;F3F4side:3.77 | 16.36       | 4.08                                |
| FHT5433-041 |                   | 60        | 151±3 | F1F2side:3.33;F3F4side:3.22 | 14.48       | 3.48                                |
| FHT5433-040 |                   | 50        | 128±3 | F1F2side:2.78;F3F4side:2.66 | 12.60       | 2.88                                |
| FHT5433-039 |                   | 40        | 105±2 | F1F2side:2.22;F3F4side:2.11 | 10.72       | 2.28                                |
| FHT5433-038 |                   | 30        | 83±2  | F1F2side:1.67;F3F4side:1.55 | 8.84        | 1.68                                |
| FHT5433-037 |                   | 20        | 60±2  | F1F2side:1.11;F3F4side:1.00 | 6.96        | 1.08                                |
| Drawing No. | Customer Part No. | Plate No. | A(mm) | Volume(L)                   | Weight (kg) | Heat transfer area(m <sup>2</sup> ) |

Connection vertical degree: ±2°

|         |      |                |          |      |
|---------|------|----------------|----------|------|
| Mark    | No.  | Change file No | sign     | Date |
| Design  | XUZH | Standard       |          |      |
| Check   |      | Approved       |          |      |
| Review  |      | Edition        | A/0      |      |
| Process |      | Date           | 20220505 |      |



Plate material: 316L

Connection material: 304

Cover plate material: 304

SNB060-N-4.5-H  
F1F2F3F4(G1"1/4)

|      |       |      |
|------|-------|------|
| View | Scale | Size |
|      | 1 : 5 |      |